

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 November 2005 (17.11.2005)

PCT

(10) International Publication Number
WO 2005/108898 A1

(51) International Patent Classification⁷: **F28F 9/02**, F25B 39/04, F25D 17/02

(21) International Application Number: PCT/JP2005/008839

(22) International Filing Date: 10 May 2005 (10.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-139328 10 May 2004 (10.05.2004) JP
60/570,475 13 May 2004 (13.05.2004) US

(71) Applicant (for all designated States except US): **SHOWA DENKO K.K.** [JP/JP]; 13-9, Shiba Daimon 1-chome, Minato-ku, Tokyo, 1058518 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SENO, Yoshihiko** [JP/JP]; c/o SHOWA DENKO K.K., OYAMA REGIONAL OFFICE, 480, Inuzuka 1-chome, Oyama-shi, Tochigi, 3238678 (JP). **KAMOSHIDA, Osamu** [JP/JP]; c/o SHOWA DENKO K.K., OYAMA REGIONAL OFFICE, 480, Inuzuka 1-chome, Oyama-shi, Tochigi, 3238678 (JP).


(74) Agents: **HIBI, Norihiko** et al.; c/o KISHIMOTO & CO., 3rd Floor, Inaba Building, 13-18, Nishishinsaibashi 1-chome, Chuo-ku, Osaka-shi, Osaka 5420086 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: HEAT EXCHANGER AND REFRIGERANT PASSAGE PORTION CONNECTING STRUCTURE FOR REFRIGERATION CYCLE

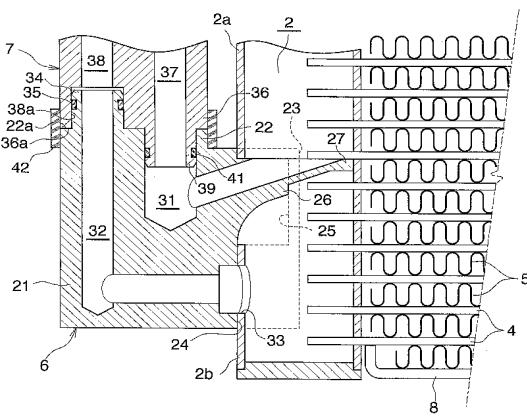

WO 2005/108898 A1

(57) Abstract: Fixed to the peripheral wall of a header 2 of a unit-type heat exchanger 1 is a receiver connecting block 6 having channels 31, 32 for causing the interior of the header 2 to communicate with the interior of a liquid receiver 7 therethrough. The block 6 and the liquid receiver 7 have respective fixing portions 32, 36 and respective contact faces 22a, 36a each provided on the fixing portion. The outer peripheral surfaces of the fixing portions 22, 36 have respective contours of the same shape and the same size. The liquid receiver 7 is fixed to the block 6 with the contact faces 22a, 36a of the fixing portions 22, 36 in intimate contact with each other. A tubular seal member 42 having rubber elasticity is liquid-tightly fitted around the fixing portions 22, 36. The seal member 42 has an inner shape smaller than the contours of the outer peripheral surfaces of the fixing portions 22, 36 and is fitted as elastically deformed around the fixing portions 22, 36. Rainwater or the like can be prevented from ingressing into an interstice between the contact faces of the block and the liquid receiver.



FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.